


3126801000

N Plug Clamp For LMR 400

50Ω

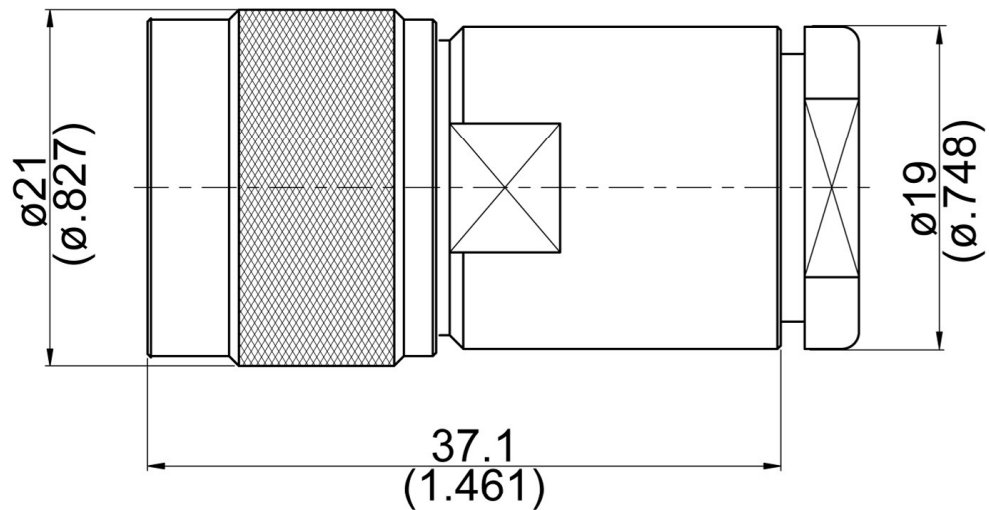

Parts	Material	Plating(Micro-inch)
Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Braid Clamp	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Center Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Contact Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 55.79 g

Suitable Cables: LMR400

This part number complies with RoHS.

Notice:

3126801000

Interface

MIL-STD-348B

Electrical Data

Impedance	50Ω
Frequency range	DC to 6GHz
VSWR	≤ 1.2 (DC to 6GHz)
Insertion loss	≤ 0.05 x √f(GHz) dB
Insulation resistance	≥ 5000MΩ
Contact resistance inner conductor	≤ 1.5mΩ
Contact resistance outer conductor	≤ 1mΩ
Dielectric withstanding voltage (at sea level)	2500 V rms
Working voltage (at sea level)	1000 V rms

Mechanical Data

Recommended coupling nut torque	6 to 10 inch lbs
Coupling proof torque	15 inch lbs
Coupling nut retention force	≥ 101.2 lbs
Contact captivation-axial	≥ 6.3 lbs
Durability (mating)	≥ 500

Environmental Data

Temperature range	-65°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Moisture resistance	MIL-STD-202, Method 106
Corrosion	MIL-STD-202, Method 101, Condition B
RoHS	Compliant

Tooling

Notice:

# CABLE ASSEMBLY INSTRUCTION

3126801000

DATE

2020/03/30

REV

—

A

B





C

D

E

F

G



BODY

CONTACT  
PIN

WASHER

BRAID  
CLAMP


GASKET

WASHER


NUT

DIAGRAM


ASSEMBLY INSTRUCTION

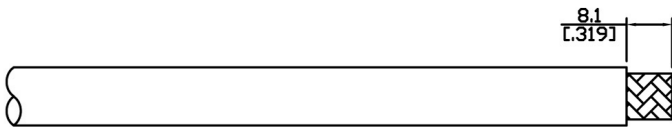


Step 1: STRIP AS SHOWN.

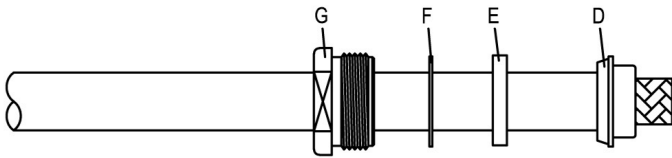


Step 2: SLIDE NUT " G " 、 WASHER " F " 、 GASKET " E " AND BRAID CLAMP " D " OVER CABLE.

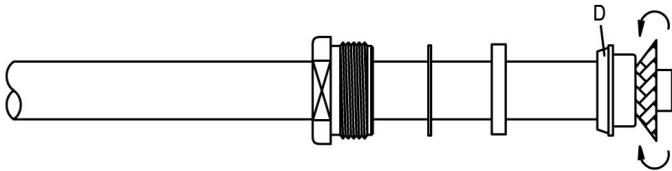


Step 3: WRAP THE BRAIDING OVER " D " .

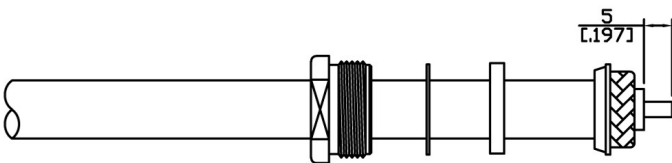

Step 4: STRIP AS SHOWN.

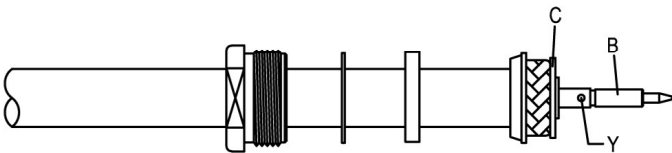

Step 5: SLIDE PREPARED CABLE INTO WASHER " C " .  
Step 6: PUT CONTACT PIN " B " ON CENTER CONDUCTOR AND SOLDER IN " Y " .

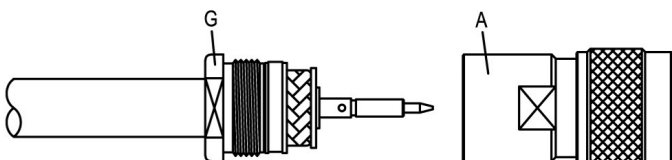

Step 7: FINALLY SCREW " G " ON THE CONNECTOR BODY " A " .

This part number complies with RoHS.

Notice:

APPROVED

CHECKED

DRAWING